





GBU8005 thru GBU810

SYNSEMI SEMICONDUCTOR

Glass Passivated Single-Phase Bridge Rectifiers
Voltage Range 50 to 1000 Volts Forward Current 8.0 Amperes

Features

- ◆ Surge overload rating - 200 Amperes peak
- ◆ Ideal for printed circuit boards
- ◆ Reliable low cost construction utilizing molded plastic technique
- ◆ Plastic material has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Mounting Position: Any

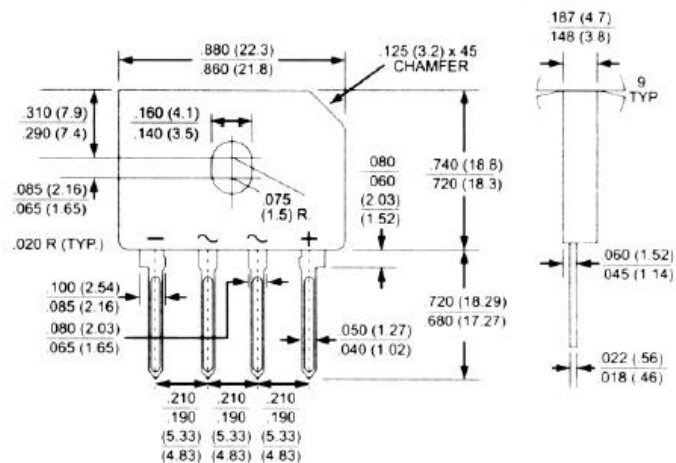

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Parameter	Symbols	GBU8005	GBU801	GBU802	GBU804	GBU806	GBU808	GBU810	Units
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	Volts
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	Volts
Maximum average forward rectified output current @ $T_c=100^\circ\text{C}$ (with heatsink Note 2) (without heatsink)	I_{FAV}				8.0	3.2			Amps
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}				200.0				Amps
Max. instantaneous forward voltage drop at 4.0A DC	V_F				1.0				Volt
Maximum DC reverse current at rated DC blocking voltage per element @ $T_j=25^\circ\text{C}$ @ $T_j=125^\circ\text{C}$	I_R				5.0	500.0			μA
Rating for fusing ($t < 8.3\text{ms}$)	I^2t				166				A^2sec
Typical junction capacitance per element (Note 1)	C_j				60				pF
Typical thermal resistance (Note 2)	$R_{\theta JC}$				2.2				$^\circ\text{C}/\text{W}$
Operating temperature range	T_j				-55 to +150				$^\circ\text{C}$
Storage temperature range	T_{STG}				-55 to +150				$^\circ\text{C}$

Notes: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC
2. Device mounted on 100mm x 100mm x 1.6mm Cu plate heatsink

GBU8005 thru GBU810

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

FIG. 1 - FORWARD CURRENT DERATING CURVE

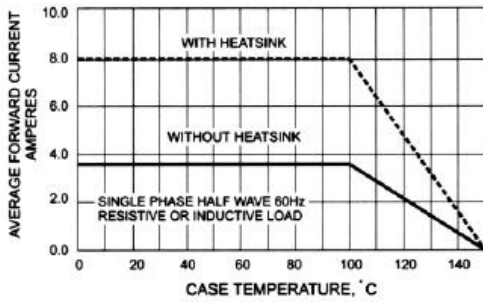


FIG. 2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

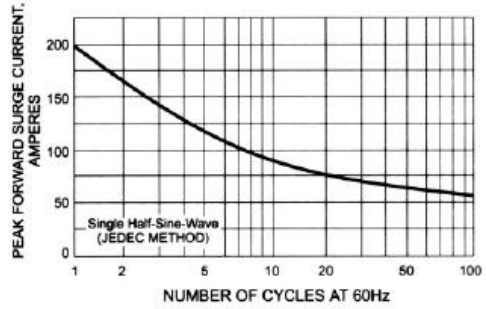


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

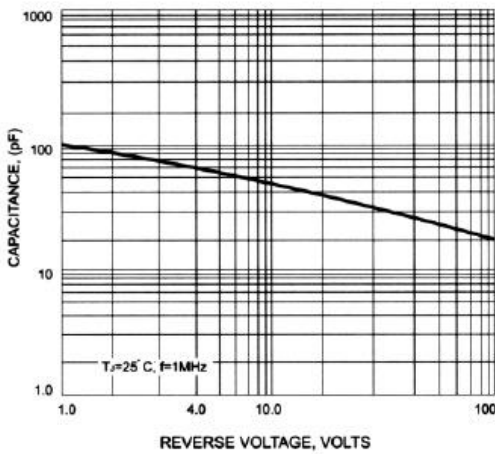


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS

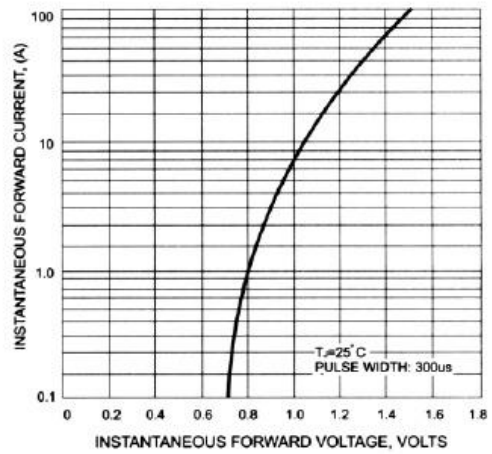


FIG. 5 - TYPICAL REVERSE CHARACTERISTICS

